



# W72 RSP Double Seat Mix Proof Valves for Particulates


## Application:

The W70 Series Mix Proof Valves for products containing large particulates.

- Gravies
- Stews
- Sauces
- Chunky soup or salsa

## Materials:

Product Wetted: ASTM 316L (UNS-S31603); (DIN-1.4404)  
 Non-Product: ASTM 304 (UNS-S30400); (DIN-1.4301)  
 Seat: Tri-Ring Compression Seal Upper Stem, Radial Seal Lower Stem  
 Elastomers: EPDM or FKM (Fluoroelastomer)  
 Finish:  $\leq 32 \text{ Ra}$  ( $\leq 0.8 \mu\text{m}$ ) *Other finishes available upon request.*

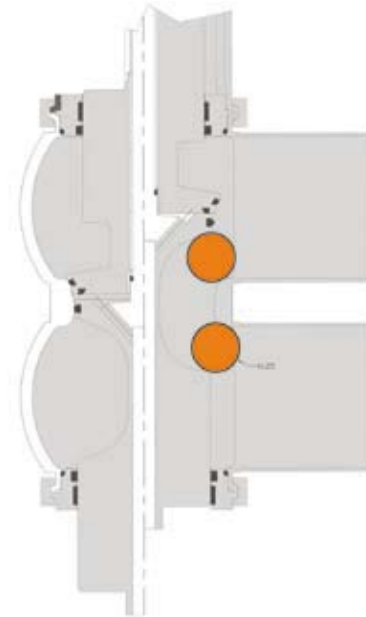

## Pressure Ratings:

Operating Pressure: 3" O.D. Tube = 150 psig (10.3 bar)  
 4" O.D. Tube = 150 psig (10.3 bar)  
 Holding Pressure: 150 psig (10.3 bar)

## Actuator:

Non Seat Lifting (NSL)

Air Requirements

Min. Supply Pressure: 75 psi (5.2 bar)  
 Air Volume 3"-4" Valves - O.D. Tube - .055 ft<sup>3</sup> (.0016 M3)

Independent Seat Lifting (SL)

Air Requirements



Min. Supply Pressure: 75 psi (5.2 bar)  
 Maximum: 100 psi (6.9 bar)  
 Air Volume 3"-4" Valves:  
 .055 ft<sup>3</sup> (.0015 m<sup>3</sup>) Open Valve  
 .162 ft<sup>3</sup> (.0046 m<sup>3</sup>) Lower Seat Lift  
 .011 ft<sup>3</sup> (.0003m<sup>3</sup>) Upper Seat Lift

## Features:


Large diameter valve plugs create open spaces for particulate flows

- 1.25" Firm Particulates
- (2) vent diameters available: standard (shown) and open vent (2.5") diameter
- Radial seal lower plug for minimal transition leakage
- Multiple body choices
- Seat lifting or non-seat lifting options
- One-piece, machined valve body available in 3" and 4"


## Seat Option & Accessories

Seat Type	Material	Maximum Temperature
 <p>Tri-Ring - Compression Seal (TR) Upper Stem</p>	EPDM or FKM (Fluoroelastomer)	Oper. 280°F (137°C) EPDM Steril. 275°F (135°C) EPDM Oper. 350°F (176°C) FKM Steril. FKM - Consult Factory
 <p>Radial - Seal Lower Stem</p>		


For higher temperature applications than those listed, please consult the factory.




External Liquid Flush




External Steam Barrier - Upper Stem




External Flush - Lower Stem



O-Ring Stem Seal




Wiping Stem Seal  
(Lower Stem Shown)

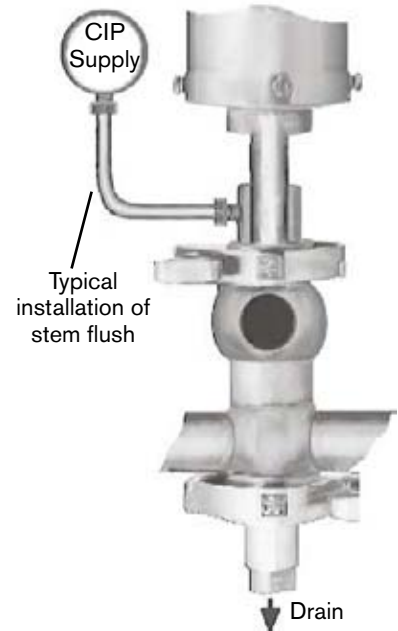


## Theory of Operation

Mixproof valves provide safe separation of dissimilar products within the same valve body.

For Example: Product vs. CIP

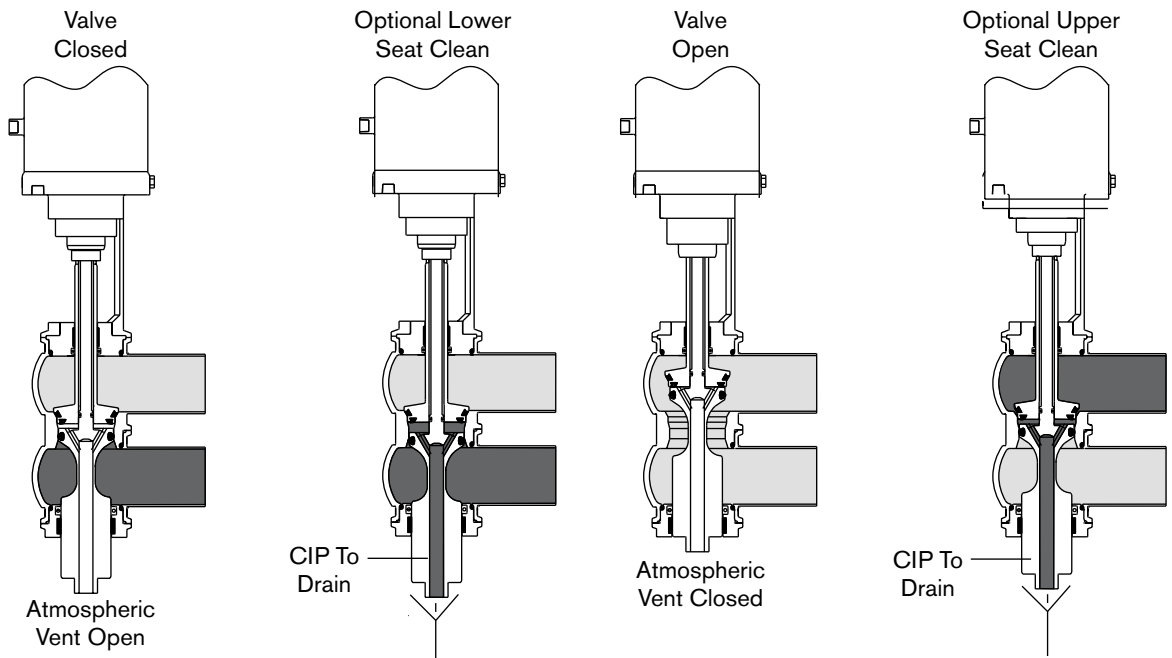


## Body Configurations W72 RSP

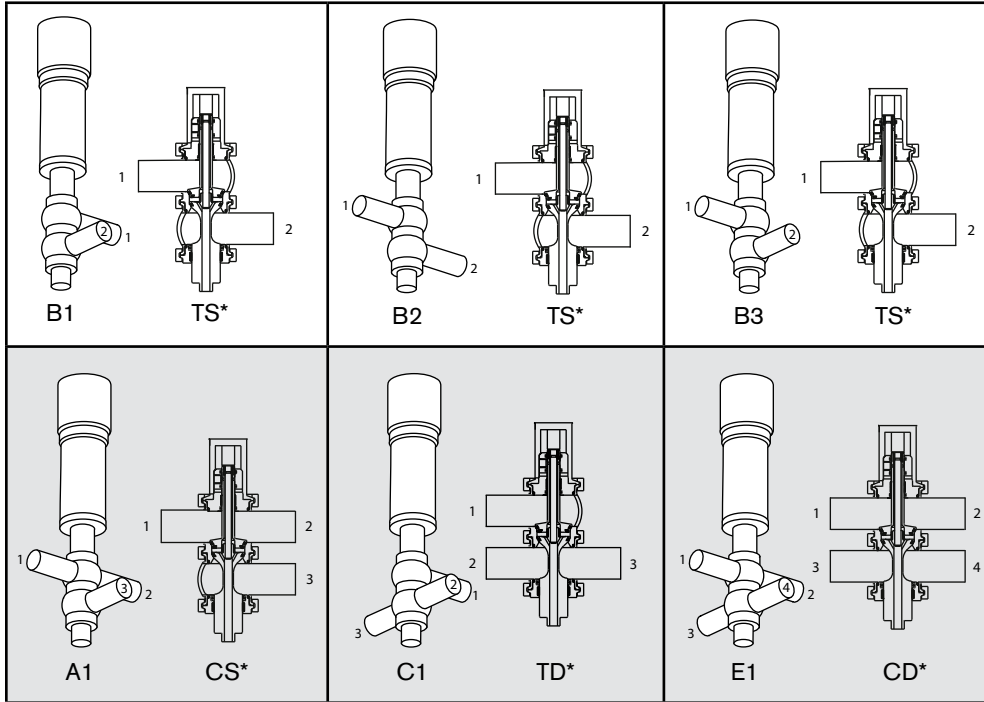

\*Two Piece Clamped Bodies allow ports to be rotated in any direction.

## Valve Dimensions

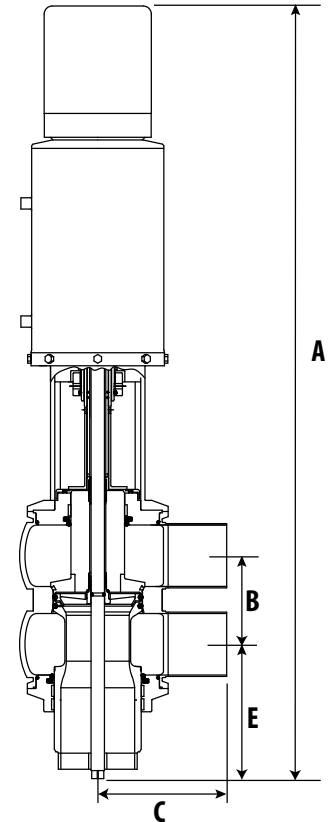

## Control Tops

### Features

- Transparent Control Top keeps all electrical components visible.
- Maintainable! Designed with the user in mind, making assembly and troubleshooting worry free and easy!
- WCB uses the industry's most widely recognized electrical components, so access to off the shelf replacement parts is easy, ensuring quick delivery and less down time!
- NEMA 4x (Ip66)

### Connector Options

- S/O Cord Grip for hard wire (STD)
- Quick Disconnect Pin Connectors

### Interface Options

- ASi Field Bus Card
- Device Net Field Bus Network Card

### Position Indication

- Inductive Proximity Switches 20-140V AC/DC, 2-Wire (STD)
- Microswitches 24VDC, 110VAC
- Intrinsically safe options 5-24VDC
- Set and forget linear switch

### Solenoid Valves

- 24V DC or 110V AC

### Manifolding and Welded Assemblies Available







- Contact Factory for Details

Valve Size Inch (mm)	A*	B	C	E*
3.0 (76)	36.6 (930)	5.13 (130)	6.0 (152)	---
4.0 (102)	36.6 (930)	5.13 (130)	6.0 (152)	---

\* A & E dimensions shown without optional lower stem flush



# Pressure Loss Curves - W72 RSP Series CV

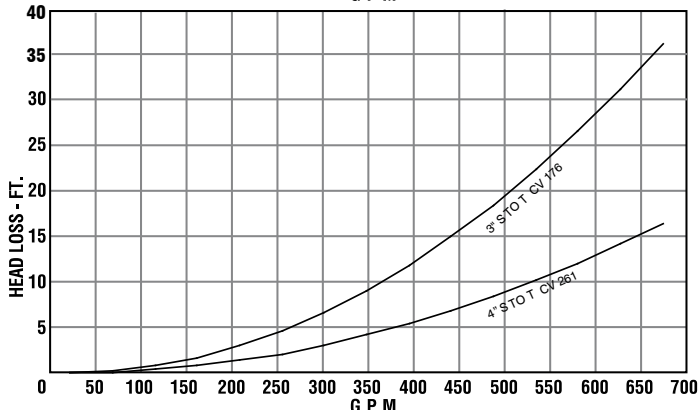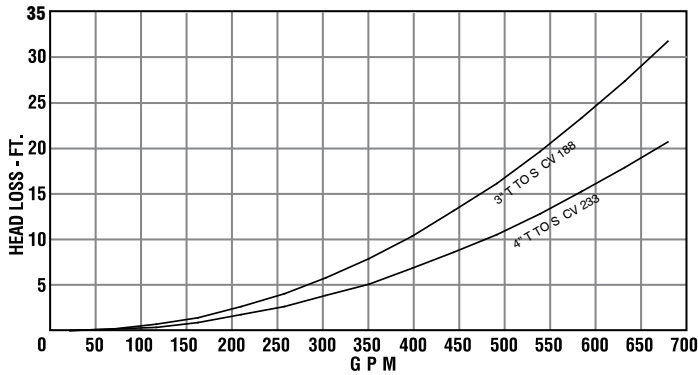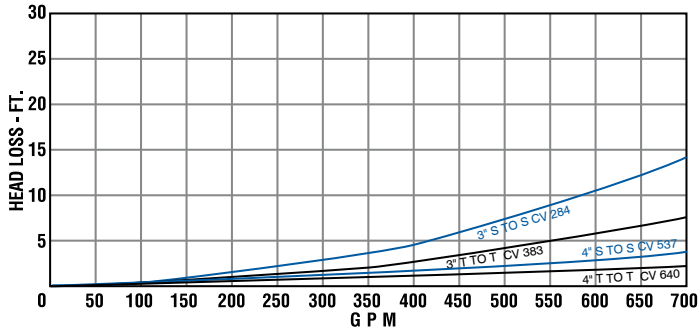

**SPX**<sup>®</sup>

PROCESS EQUIPMENT



Your local contact:



SPX Process Equipment  
 611 Sugar Creek Road  
 Delavan, WI 53115  
 Phone: (262)728-1900 or (800)252-5200 Fax: (262)728-4904 or (800)252-5012  
 E-mail: wcb@spx.com

For more information about our worldwide locations, approvals, certifications, and local representatives, please visit [www.spxpe.com](http://www.spxpe.com).

SPX Corporation reserves the right to incorporate our latest design and material changes without notice or obligation.

Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing.

Issued: 04/2009 DS-1225

Copyright © 2009 SPX Corporation